
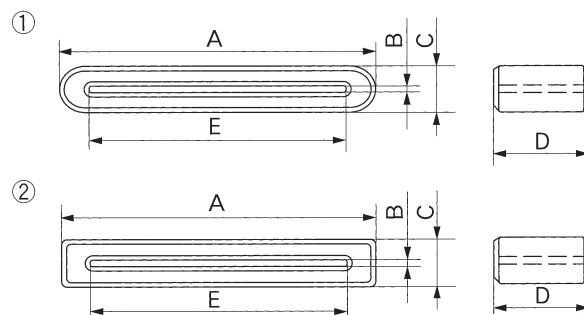


スリムコアGFPC

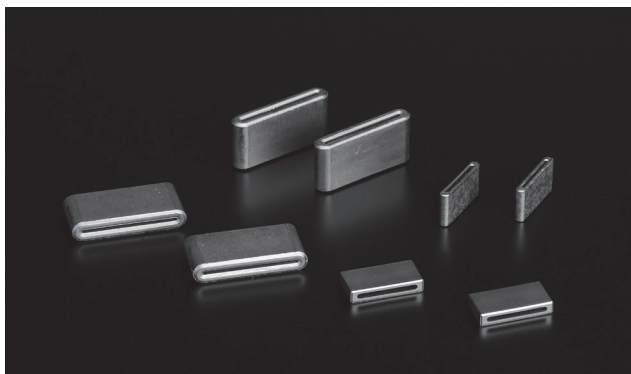

(単位: mm)

品番	A	B	C	D	E	インピーダンス※Ω100MHz (1ターン)	形状	
GFPC-11-8-2	11.0	0.7	2.3	8.0	9.0	≧25	①	
GFPC-16-8-2	15.5				12.0			
GFPC-18-3-2	18.0				3.0			14.5
GFPC-18-8-2					8.0			18.0
GFPC-22-8-2	21.5							
GFPC-16-5-3	16.0	0.5	3.0	5.0	11.5	≧20	②	
GFPC-16-8-3				8.0	11.5	≧25		
GFPC-24-12-3	23.3	0.9	3.0	12.0	20.0	≧30		
GFPC-25-10-3	25.5	0.8		10.0	21.5	≧25		
GFPC-25-15-3				15.0	21.5	≧35		
GFPC-31-12-3	31.0	1.0		12.0	27.0	≧30	①	
GFPC-16-12	16.0	0.5	5.0	20.0	11.5	≧45		
GFPC-16-20		0.8			20.0	11.5		≧60
GFPC-25-12	24.5	0.5		12.0	20.0	≧35		
GFPC-25-20				20.0	20.0	≧50		
GFPC-31-12	31.0			12.0	27.0	≧40		
GFPC-46-12	46.0		41.5					
GFPC-56-12	56.2		52.4			≧35		

インピーダンス周波数特性※

