


# インシュロックタイ

## ■スタンダードタイ

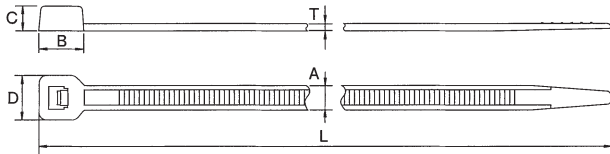


- さまざまな配線作業に適しています。
- 材質は66ナイロンです。

(単位：mm)

品番	L	A	B	C	D	T	結束径φ		引張強度N (kgf)	販売単位
							最小	最大		
SHT18R	100	1.8	4.0	2.6	3.5	1.2		22	80 (8.16)	1000本
T18S	80	2.2	4.4	3.2	4.2	1.0	1.0	16		
T18R	100	2.5	4.8	3.5	4.8	1.1		22		
T18I	148	2.5	4.8					35		
T18L	205				3.9	4.5	1.5		55	
T25L	240	2.8	6.4	4.0	5.0	1.4		65	110 (11.22)	100本
T30R	152	3.5	5.9	4.4	6.1	1.2	1.0	36	135 (13.77)	
T30L	202	3.6	5.5	4.0	6.2				50	
T40S	153	3.5	6.4	4.4	6.5	1.3	1.5	37	18.0 (18.35)	
T40I	296	4.0	7.0	5.1	7.0				75	
T50S	158	4.7	7.5	5.5	8.5	1.2	1.5	35	225 (22.94)	
T50R	202	4.6	7.3	5.9	7.6					
T50L	383	4.8	9.0	8.5	6.0	1.5	2.5	105		
T60S	251							65		
T60R	301						8.8	80		
T120S	225	7.6	10.0	7.7	13.15	1.6	5.0	55	535 (54.56)	50本
T120I	300		10.2		13.0			75		
T120R	382	7.5	10.8	6.5	1.8	3.0	100			
T120M	460	7.6	10.6	7.6		12.5	15.0	130		
T120L	760			10.0	7.8	13.0	1.9	5.0		

## ■マウンティングタイ

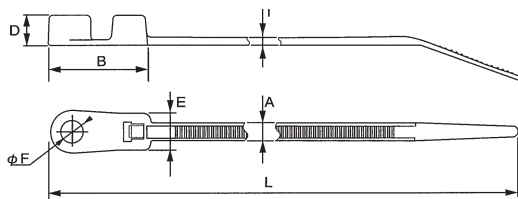

- 材質は66ナイロンです。

(単位：mm)

品番	L	A	B	D	E	φF	T	使用ビス	結束径φ		引張強度N (kgf)	販売単位
									最小	最大		
T18MR	111	2.5	14.0	4.2	5.2	3.1	1.1	M3	1.0	20	80 (8.16)	100本
T30MR	157	3.5	15.1	4.0	7.0	4.1	1.2			M4	32	
T50MS	165	4.6	20.0	5.5	9.0	5.3		1.3	M5		1.5	
T50MR	215	4.7	20.5		8.5	5.2	1.2			M5		
T50ML	390		20.0	5.7	9.0	5.5						
T120MR	395	7.6	28.4	7.9	13.4	6.5	1.8	M6	5.0	102	535 (54.56)	