



スナッパ- SNP

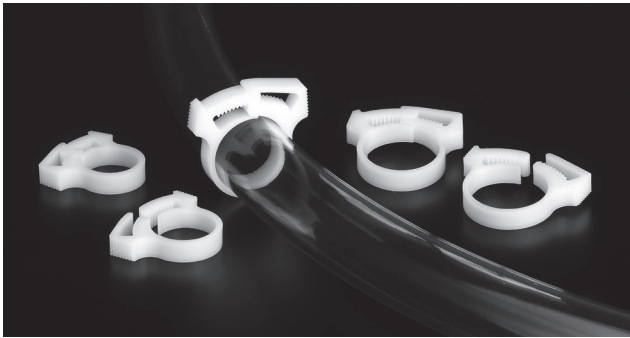

- 簡単に止めることができ、取外しと再使用が可能です。
- 標準タイプ・耐熱タイプ（105℃）・耐候タイプを揃えています。
- 材質
 標準タイプ：ポリアセタール（白）
 耐熱タイプ：ガラス繊維入り66ナイロン（黒）
 耐候タイプ：66ナイロン（黒）

■ 標準タイプ

(単位：mm)

| 品番 | φD | φD1 | T | W | A | B | 販売単位 |
|---------|------|------|-----|------|------|------|------|
| SNP-1 | 6.0 | 6.5 | 1.0 | 3.8 | 11.5 | 8.1 | 100個 |
| SNP-1.5 | 8.0 | 8.5 | 1.4 | 3.7 | 14.9 | 10.4 | |
| SNP-2 | 9.0 | 10.0 | 1.7 | 5.9 | 17.1 | 12.0 | |
| SNP-4 | 10.5 | 11.5 | 1.6 | 5.8 | 18.4 | 13.1 | |
| SNP-6 | 11.5 | 13.0 | 1.7 | 5.9 | 20.9 | 14.1 | |
| SNP-7 | | 14.0 | | | 27.6 | 17.4 | |
| SNP-8 | 13.0 | 15.0 | 1.8 | | 23.7 | 15.4 | |
| SNP-10 | 15.0 | 16.5 | 1.7 | | 25.9 | 16.8 | |
| SNP-12 | 16.0 | 18.0 | 1.8 | | 26.5 | 17.0 | |
| SNP-14 | 18.0 | 20.5 | 1.7 | | 29.5 | 18.8 | |
| SNP-16 | 19.5 | 21.5 | 1.6 | 30.3 | 19.8 | | |
| SNP-18 | 20.0 | 23.0 | 1.8 | 6.1 | 33.4 | 21.4 | |
| SNP-19 | 22.5 | 25.5 | 1.6 | 5.9 | 35.4 | 24.0 | |
| SNP-22 | 24.0 | 27.5 | 1.8 | | 36.4 | 22.6 | |
| SNP-24 | 25.5 | 28.5 | 1.7 | 7.4 | 38.4 | 26.0 | |
| SNP-28 | 28.5 | 32.5 | | | 40.3 | 24.9 | |

■ 耐熱タイプ

(単位：mm)

| 品番 | φD | φD1 | T | W | A | B | 販売単位 |
|-------------|------|------|-----|-----|------|------|------|
| SNP-1-HSO | 6.0 | 6.5 | 1.0 | 3.8 | 11.6 | 8.2 | 100個 |
| SNP-1.5-HSO | 8.0 | 9.0 | 1.4 | 3.7 | 15.1 | 11.5 | |
| SNP-2-HSO | 9.5 | 10.0 | 1.7 | 5.9 | 17.2 | 12.1 | |
| SNP-4-HSO | 11.0 | 12.0 | 1.6 | | 18.8 | 13.2 | |
| SNP-6-HSO | 12.0 | 13.5 | 1.7 | 6.0 | 21.3 | 14.3 | |
| SNP-7-HSO | | 14.5 | | 5.9 | 28.0 | 17.7 | |
| SNP-8-HSO | 13.5 | 15.5 | 1.8 | 6.0 | 24.4 | 15.8 | |
| SNP-10-HSO | 15.0 | 17.0 | 1.7 | | 26.3 | 17.2 | |
| SNP-12-HSO | 16.5 | 18.5 | 1.8 | | 27.1 | 17.3 | |
| SNP-14-HSO | 18.5 | 21.0 | 1.7 | 5.9 | 30.0 | 19.1 | |
| SNP-16-HSO | 20.0 | 22.0 | 1.6 | | 30.8 | 20.1 | |
| SNP-18-HSO | 21.0 | 23.5 | 1.8 | 6.1 | 33.9 | 21.6 | |
| SNP-19-HSO | 23.0 | 26.0 | 1.7 | 6.0 | 36.0 | 24.3 | |
| SNP-22-HSO | 24.5 | 28.0 | 1.8 | 5.9 | 36.9 | 22.9 | |
| SNP-24-HSO | 26.5 | 29.5 | | 7.5 | 39.4 | 26.7 | |
| SNP-28-HSO | 29.5 | 33.5 | 1.7 | 7.4 | 41.3 | 25.4 | |

■ 耐候タイプ

(単位：mm)

| 品番 | φD | φD1 | T | W | A | B | 販売単位 |
|-----------|------|------|-----|-----|------|------|------|
| SNP-4-OW | 11.0 | 12.0 | 1.6 | 5.9 | 18.7 | 13.1 | 100個 |
| SNP-6-OW | 12.0 | 13.0 | 1.7 | 6.0 | 21.0 | 14.2 | |
| SNP-7-OW | | 14.5 | | 5.9 | 27.6 | 17.4 | |
| SNP-8-OW | 13.5 | 15.0 | 1.8 | 6.0 | 24.1 | 15.7 | |
| SNP-10-OW | 15.0 | 17.0 | 1.7 | | 25.9 | 17.0 | |
| SNP-12-OW | 16.5 | 18.5 | 1.8 | | 26.4 | | |
| SNP-14-OW | 18.5 | 21.0 | 1.7 | 5.9 | 29.4 | 18.8 | |
| SNP-16-OW | 20.0 | 22.0 | 1.6 | | 30.2 | 19.6 | |
| SNP-18-OW | 20.5 | 23.5 | 1.8 | 6.1 | 33.4 | 21.4 | |
| SNP-19-OW | 23.0 | 26.0 | 1.7 | 6.0 | 35.6 | 24.0 | |
| SNP-22-OW | 24.0 | 27.5 | 1.8 | 5.9 | 36.4 | 22.7 | |
| SNP-24-OW | 26.0 | 29.0 | | 7.5 | 38.7 | 26.2 | |
| SNP-28-OW | 29.5 | 33.5 | 1.7 | 7.4 | 40.1 | 25.0 | |