
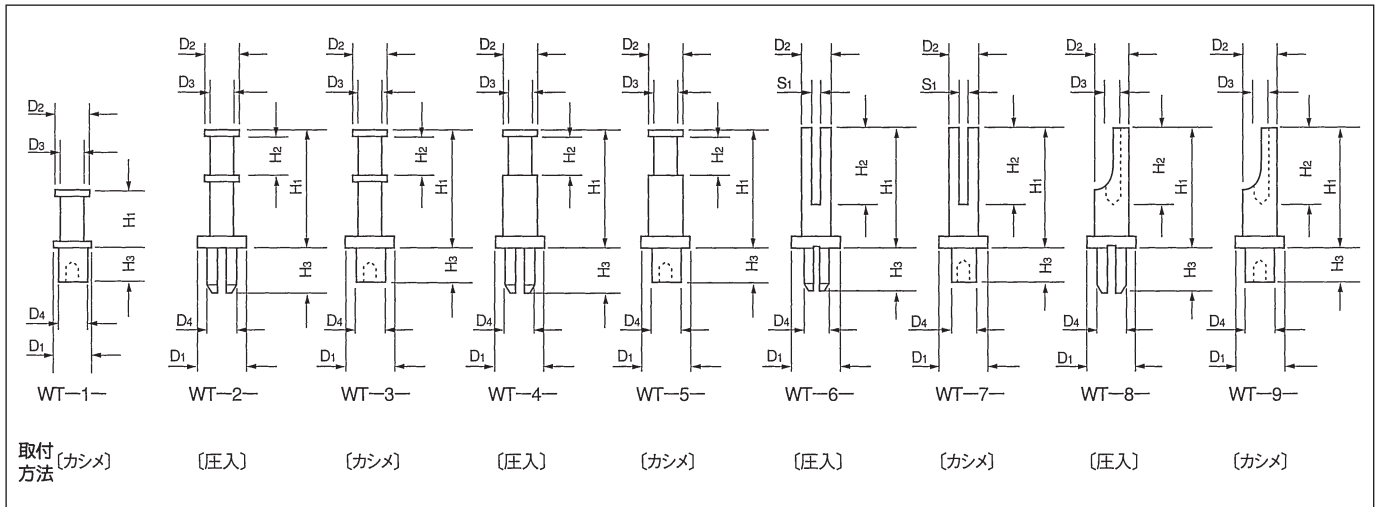


# プリント板用端子WT

## 配線用端子〔WTシリーズ〕

- 電線の巻付け、引掛け、1点付け、CRの取付け及びチェック用などにご使用下さい。
- 材質……黄銅
- 処理……ニッケル下地金メッキ
- ※ 圧入タイプは半田付の為の仮固定です。  
必ず半田付して下さい。
- ※ カシメタイプも半田付して下さい。

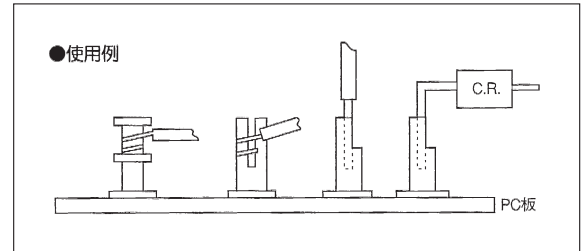

(単位：mm)

品番	D <sub>1</sub>	D <sub>2</sub>	D <sub>3</sub>	D <sub>4</sub>	H <sub>1</sub>	H <sub>2</sub>	H <sub>3</sub>	プリント板取付穴φ	圧入工具 先端チップ	販売単位					
WT-1-1	2.5	2.0	1.5	1.5	3.95	—	2.35	1.6	—	1000個					
WT-1-2	3.0				5.35	—		1.8							
WT-1-3	3.5				6.65	—		2.0							
WT-2-1	3.0	2.2	1.3	1.62	8.0	2.5	3.0	1.6	P-7						
WT-2-2					3.5	—									
WT-2-3					4.0	3.0	1.8	2.02	8.5		4.0	4.5	2.0 (板厚3.2t用)	P-8	
WT-2-4									—		—				
WT-3-1	3.0	2.2	1.3	1.7	8.0	2.5	2.5	1.8	—						
WT-3-2					3.5	—									
WT-3-3					4.0	3.0	1.8	1.9			8.5	4.0	4.0	2.0 (板厚3.2t用)	
WT-3-4	—	—													
WT-4-1	3.0	2.0	1.3	1.62	8.0	2.5	3.0	1.6	P-7						
WT-4-2						3.0				—					
WT-4-3						3.5				—					
WT-5-1				3.0		2.0	1.3	1.7	2.5	2.5	1.8	—			
WT-5-2									3.0				—		
WT-5-3									3.5				—		
WT-6-1				3.5		2.5	S <sub>1</sub> =0.8	2.02	8.0	5.0	3.0	1.6	P-7		
WT-6-2							2.2							S <sub>1</sub> =1.0	2.0
WT-6-3							2.5							S <sub>1</sub> =1.2	2.0
WT-7-1				3.0		2.0	S <sub>1</sub> =0.8	1.7		5.0	2.5	1.8	—		
WT-7-2	S <sub>1</sub> =1.0	—													
WT-7-3	S <sub>1</sub> =1.2	1.9													
WT-8-1	3.0	2.0	0.7	1.62	5.5	3.0	1.6	P-5							
WT-8-2			0.8												
WT-8-3			1.0												
WT-8-4			1.2												
WT-9-1	2.5	1.6	0.7	1.7		5.5	2.5	1.8	—						
WT-9-2			0.8												
WT-9-3			1.0												
WT-9-4			1.2												

※ 圧入工具については9-22ページをご覧ください。